


主仕様	
試験圧力	26.47MPa
最高使用圧力	17.65MPa
最大出力トルク	11.76kN-m
作動油量(1度時)	0.0134L/度
総重量(概算)	177kgG/180度
使用作動油	一般作動油(ISO VG32)
塗装色	錆止メ塗装
許容ラジアル荷重	54.0kN
許容スラスト荷重	47.3kN

JIS	B	H
新JIS	25 ^{-0.052}	50 ⁺⁰ _{-0.310}
旧JIS		

回転角	L全長
90	590
180	829
270	1068
360	1306

$L = 351 + (\text{回転角} \times 2.653)$

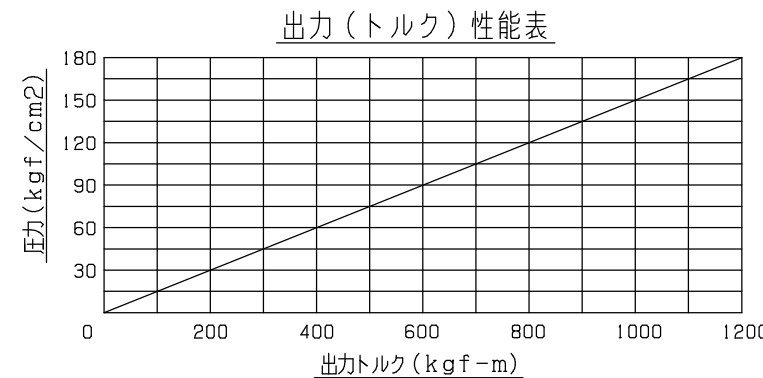

G1、揺動、05、外観

PLAN RECORD	基本仕上	MARK	PARTICULAR	QUAN	MATERIAL	SIZE	WEIGHT	REMARK
					AW-T1.2S-*			
	寸法許容差	C H I E F						
	区分	許容差	H E A D					
	1~4	±0.1	CHECKED BY					
	5~16	±0.2	DRAWN BY					
	17~63	±0.3	DATE DRAWN					
	64~250	±0.5	SCALE 1/4					
	250~1000	±0.8						
					DRAWING NO.	A3-0186		
					SAEKI ENGINEERING Co., LTD.			

記号
400S
100S
25S
6.3S
0.8S