


SPECIFICATION	
TEST PRESSURE	20.3MPa (207kgf/cm <sup>2</sup> )
MAX. TORQUE	15000kgf-m at 13.5MPa (138kgf/cm <sup>2</sup> )
RATED TORQUE	11000kgf-m at 9.8MPa (100kgf/cm <sup>2</sup> )
ROTATION ANGLE	150 DEG ±1°
CYL. OIL QUANTITY	0.218 LITER/DEG.
CASING OIL CAPAC.	30L (SPINDLE OIL at ISO-VG46)
WORKING FLUID	POLYOLE ESTER
WEIGHT	2000kgG

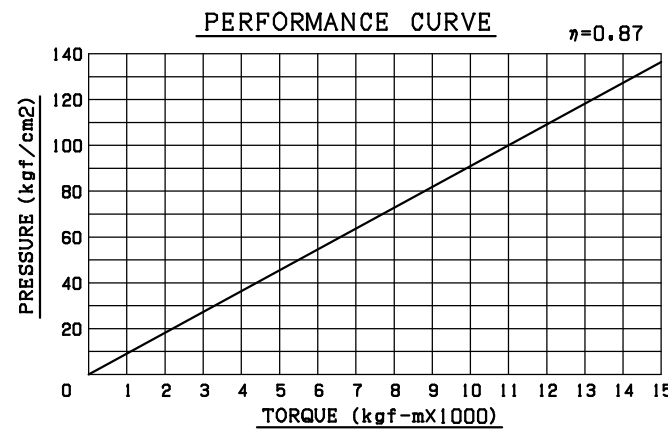

PLAN RECORD	基本仕上	MARK	PARTICULAR	QUAN	MATERIAL	SIZE	WEIGHT	REMARK
	寸法許容差	CHIEF						
	区分許容差	HEAD						
	1 ~ 4 ±0.1	CHECKED BY						
	5 ~ 16 ±0.2	DRAWN BY						
	17 ~ 63 ±0.3	DATE DRAWN						
	64 ~ 250 ±0.5	SCALE	1/7					
	250~1000 ±0.8							
				AW-T15.0H-150BC				
				ROTARY ACTUATER				
				DRAWING NO. A2-0239				
				SAEKI ENGINEERING Co., LTD.				

記号  
4005  
1005  
255  
6.38  
0.85